


# Aus-Grout Pro

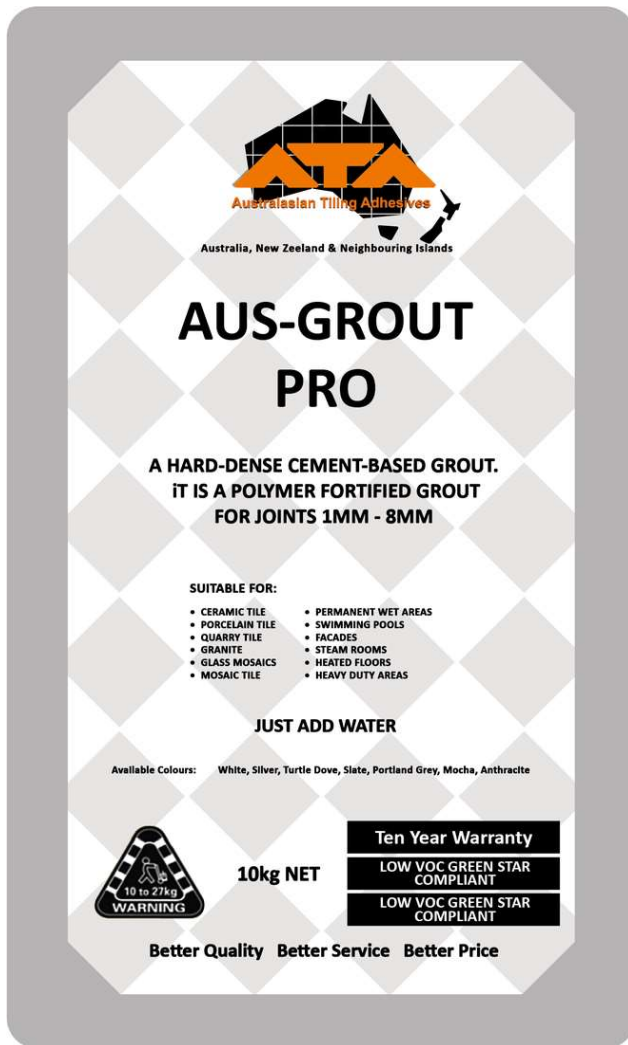

Provides a hard-dense grout for most size joints, it is polymer fortified that is used for grouting a wide range of tile, mosaics and stone. A small test area should be carried out to ensure suitability and the required outcome on the project.

Available in 10kg Bags

Available in a range of colours, please refer to *Grout Colour Chart*

## ATA Grout Coverage Chart KG per m<sup>2</sup>

| Tile Size        | Joint | 1.5mm | 3mm   | 6mm   |
|------------------|-------|-------|-------|-------|
| 50 x 50 x 6mm    |       | 0.6kg | 1.2kg | 2.4kg |
| 100 x 100 x 6mm  |       | 0.4kg | 0.8kg | 1.6kg |
| 150 x 150 x 6mm  |       | 0.3kg | 0.6kg | 1.2kg |
| 100 x 200 x 6mm  |       | 0.3kg | 0.6kg | 1.2kg |
| 200 x 200 x 6mm  |       | 0.2kg | 0.4kg | 0.8kg |
| 300 x 300 x 10mm |       | 0.3kg | 0.6kg | 1.2kg |
| 300 x 600 x 10mm |       | 0.2kg | 0.3kg | 0.6kg |
| 600 x 600 x 10mm |       | 0.2kg | 0.3kg | 0.6kg |

The above is a coverage estimation and may vary due to site conditions and wastage, allow 20% wastage.

## Uses

- Ceramic Tile
- Porcelain Tile
- Quarry Tile
- Granite
- Glass Mosaics
- Mosaic Tile
- Permanent Wet Areas
- Swimming Pools
- Facades
- Steam Rooms
- Heated Floors
- Heavy Duty Areas

Internal and external use

