


# Aus-Screed Lightweight

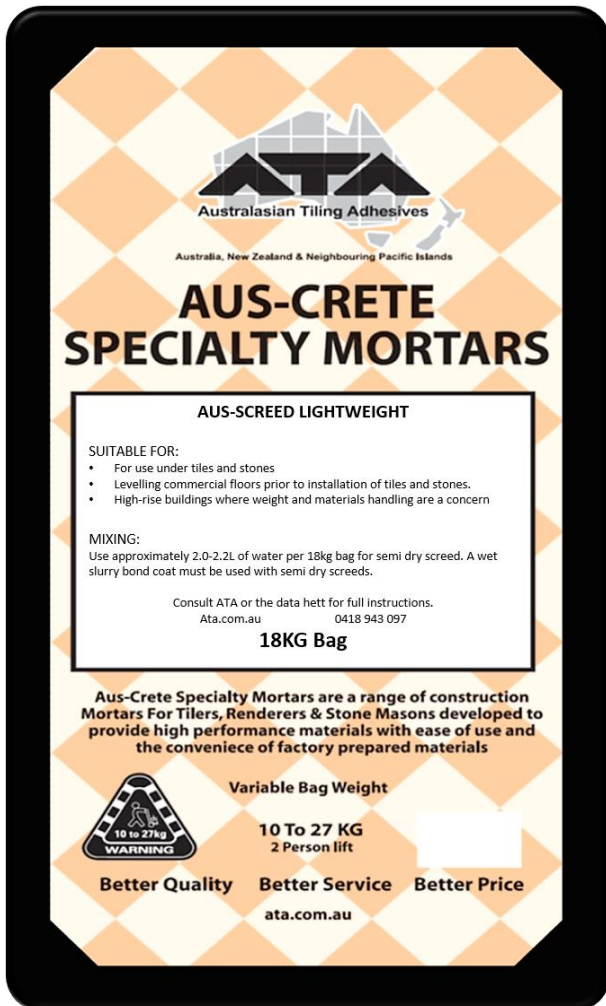

High Strength, polymer modified lightweight mortar for screeding without the use of latex additives.

30% lighter than conventional screeds.

Available in grey, 18kg

## Uses:

Can be applied from 15mm to 100mm± in one application as a semi dry mix over a wet slurry bond coat.

## Suitable for:

- For use under tile and stone
- Levelling commercial floors prior to the installation of tile or stone
- High-rise buildings where weight and materials handling are a concern.

Internal and external use.

## Coverage

Coverage per bag*
1.7m <sup>2</sup> @ 15mm

\*Coverage of adhesives, screeds and membranes are a guide only as there are other factors to take into account. Large tiles consume more adhesive, rough out of plain surfaces consume more materials. Tile should always be installed as per Australian Standards and good trade practices. Tile and stone should be fully bedded to provide long term support and durability. Large tile and stone should be back buttered to ensure good bond.