



AUS-CRETE PREMIUM

EXTRA HEAVY-DUTY ADHESIVE – C2TES1

DESCRIPTION

Aus-Crete Premium Industrial is a high performance, flexible, polymer fortified cement-based adhesive that is suitable for extra heavy duty installations, industrial & commercial walls and floors, swimming pools and areas subject to constant underwater exposure. It is also suitable for facades, areas subject to thermal and physical shock, rapid transit constructions and areas subject to constant heavy vehicle traffic.

Suitable for internal and external use.
Available in white, off-white and grey.


Aus-Crete Premium Industrial can be used as a slurry bond coat for adhering screeds and mortars. It can also be used as a slurry bond coat over semi dry screeds for installing tile and stone in the conventional mud bed method.

USES

- EXTRA LARGE TILE AND STONE
- MARBLE AND GRANITE
- PORCELAIN TILE
- QUARRY AND MOSAIC TILE
- TILE OVER TILE
- ALL MASONRY SURFACES
- RENDER, BRICK AND BLOCKWORK
- CEMENT SHEET AND PLASTERBOARD
- SUITABLE WATERPROOF MEMBRANES AND PERMANENT WET AREAS

COVERAGE (per 20kg bag)

6 x 6 mm trowel	10 x 10 mm trowel
8 – 10 m ²	6 m ²

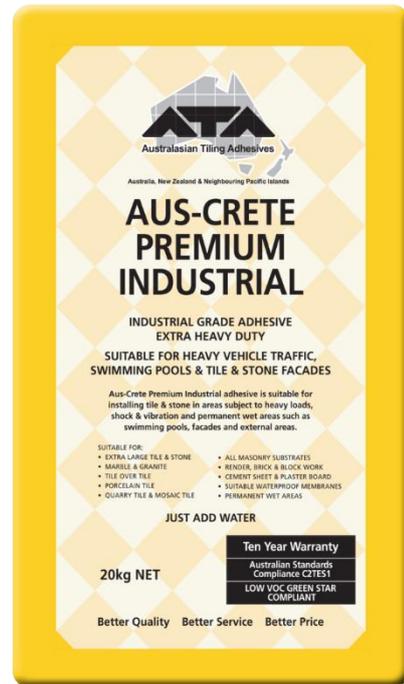

TECHNICAL NOTES (AT 21°C)

OPEN TIME	30 MINUTES
POT LIFE	2 HOURS
INITIAL SET	8 HOURS
FOOT TRAFFIC	24 HOURS
HEAVY TRAFFIC	72 HOURS

TECHNICAL NOTES (AT 28 DAYS)

TENSILE STRENGTH (TS)	≥ 1.75 MPa
TS, 21 DAYS IMMERSSED	≥ 1.00 MPa
TS, 14 DAYS HEAT AGED	≥ 1.50 MPa
TRANSVERSE DEFORMATION	≥ 3.25 mm < 5.00 mm