



AUS-CRETE SUPER

CEMENT-BASED ADHESIVE – C2S1

DESCRIPTION

Aus-Crete Super provides great coverage and is easy to use. **Aus-Crete Super** will install tile and stone to: concrete, cement render and screeds. For internal and external use. Suitable for porcelain tile.


Suitable for internal and external use.
Available in white.

Mix with Aus-Bond Industrial Latex Admix in place of water for heated floors and C2S2 performance.

USES

- TILE AND STONE
- MARBLE AND GRANITE
- PORCELAIN
- QUARRY TILE AND CERAMICS
- MOSAIC AND GLASS TILE*
- ALL MASONRY SURFACES
- RENDER, BRICK AND BLOCKWORK
- CEMENT SHEET AND PLASTERBOARD*
- SUITABLE WATERPROOF MEMBRANES*

* When mixed with Aus-Bond Latex Admix

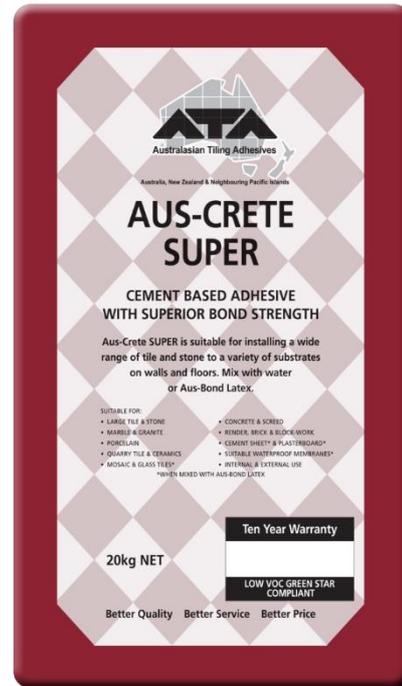

TECHNICAL NOTES (AT 21°C)

OPEN TIME	20 MINUTES
POT LIFE	2 HOURS
INITIAL SET	8 HOURS
FOOT TRAFFIC	24 HOURS
HEAVY TRAFFIC	72 HOURS

COVERAGE (per 20kg bag)

6 x 6 mm trowel	10 x 10 mm trowel
7 – 9 m ²	4 – 5 m ²