



# AUS-FLEX MULTI


POLYMER AND RUBBER REINFORCED ADHESIVE – C1ES1

## DESCRIPTION

**Aus-Flex Multi** is a high performance, flexible, polymer and rubber fortified adhesive that is used for installing a wide range of tile and stone. **Aus-Flex Multi** provides great coverage and is easy to use. **Aus-Flex Multi** will install tile and stone to a very wide range of substrates: cement sheet, plasterboard, suitable waterproof membranes, concrete, render and screeds.

Suitable for internal and external use.

Mix with Aus-Bond Industrial Latex Admix in place of water for heated floors and C2S2 performance.

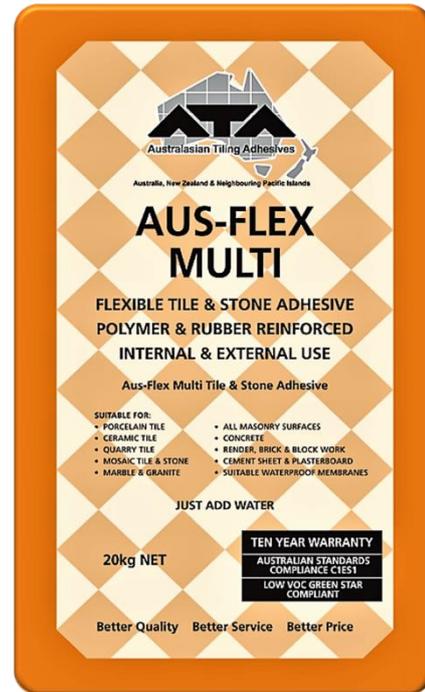

## USES

- PORCELAIN TILE
- ALL MASONRY SURFACES
- CERAMIC TILE
- CONCRETE
- QUARRY TILE
- RENDER, BRICK AND BLOCK WORK
- MOSAIC TILE AND STONE
- CEMENT SHEET AND PLASTERBOARD
- MARBLE AND GRANITE
- SUITABLE WATERPROOF MEMBRANES

## COVERAGE (per 20kg bag)

|                       |                      |
|-----------------------|----------------------|
| 6 x 6 mm trowel       | 10 x 10 mm trowel    |
| 8 – 10 m <sup>2</sup> | 7 – 9 m <sup>2</sup> |

## TECHNICAL NOTES (AT 21°C)

|               |            |
|---------------|------------|
| OPEN TIME     | 30 MINUTES |
| POT LIFE      | 2 HOURS    |
| INITIAL SET   | 8 HOURS    |
| FOOT TRAFFIC  | 24 HOURS   |
| HEAVY TRAFFIC | 72 HOURS   |

## TECHNICAL NOTES (AT 28 DAYS)

|                        |                        |
|------------------------|------------------------|
| TENSILE STRENGTH (TS)  | ≥ 1.00 MPa             |
| TS, 21 DAYS IMMERSERD  | ≥ 0.50 MPa             |
| TS, 14 DAYS HEAT AGED  | ≥ 0.50 MPa             |
| TRANSVERSE DEFORMATION | ≥ 2.50 mm<br>< 5.00 mm |