



# AUS-FLEX MULTI LIGHT 9.5


FLEXIBLE LIGHTWEIGHT POLYMER & RUBBER REINFORCED ADHESIVE – C1ES1

## DESCRIPTION

**Aus-Flex Multi Light 9.5** is a high performance, flexible, polymer and rubber fortified adhesive incorporating unique lightweight fillers that is used for installing a wide range of tile and stone. **Aus-Flex Multi Light 9.5** provides great coverage and is easy to use. **Aus-Flex Multi Light 9.5** will install tile and stone to a very wide range of substrates: cement sheet, plasterboard, suitable waterproof membranes, concrete, render and screeds.

Suitable for internal and external use. Not for use in permanent wet areas.

Mix with Aus-Bond Industrial Latex Admix in place of water for heated floors and C2S2 performance.

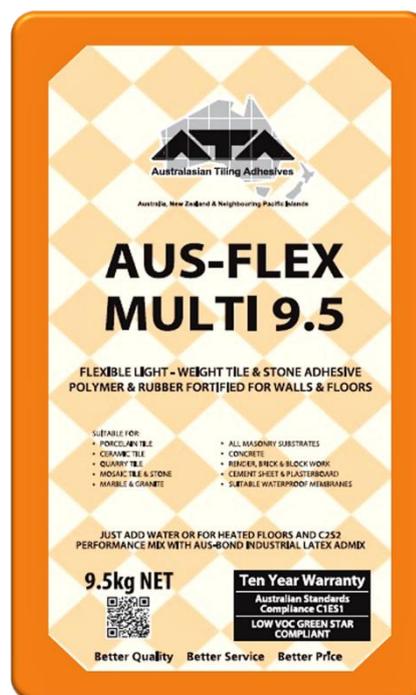

## USES

- PORCELAIN TILE
- ALL MASONRY SURFACES
- CERAMIC TILE
- CONCRETE
- QUARRY TILE
- RENDER, BRICK AND BLOCK WORK
- MOSAIC TILE AND STONE
- CEMENT SHEET AND PLASTERBOARD
- MARBLE AND GRANITE
- SUITABLE WATERPROOF MEMBRANES

## COVERAGE (per 20kg bag)

6 x 6 mm trowel	10 x 10 mm trowel
8 – 10 m <sup>2</sup>	7 – 9 m <sup>2</sup>

## TECHNICAL NOTES (AT 21°C)

OPEN TIME	30 MINUTES
POT LIFE	2 HOURS
INITIAL SET	8 HOURS
FOOT TRAFFIC	24 HOURS
HEAVY TRAFFIC	72 HOURS

## TECHNICAL NOTES (AT 28 DAYS)

TENSILE STRENGTH (TS)	≥ 0.80 MPa
TS, 21 DAYS IMMersed	≥ 0.50 MPa
TS, 14 DAYS HEAT AGED	≥ 0.50 MPa
TRANSVERSE DEFORMATION	≥ 3.50 mm < 5.00 mm